


# AUDIO NOTE

TRANS-011. PRE-AMPLIFIER OUTPUT TRANSFORMER.

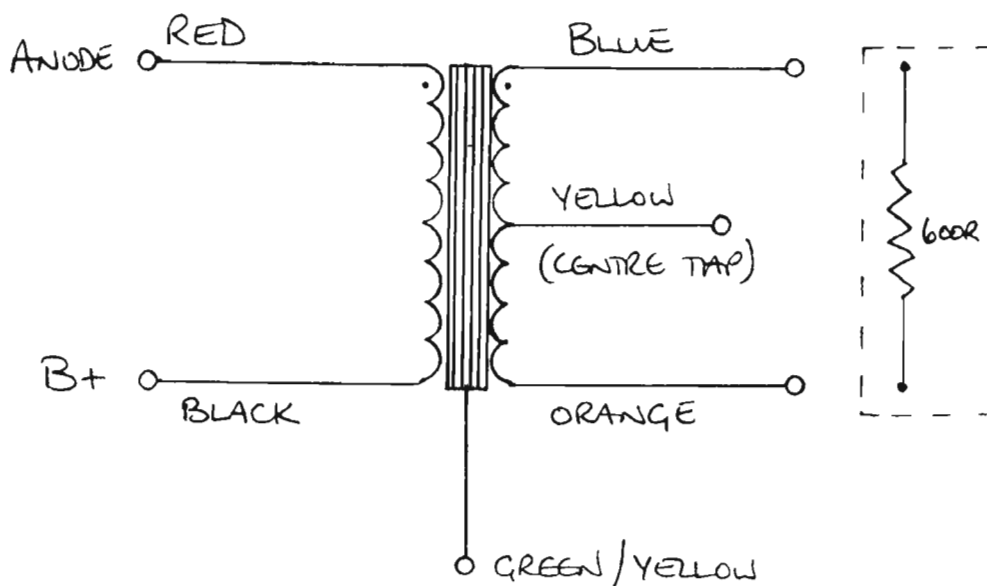

- ① FOR UNBALANCED OUTPUT YELLOW WIRES ARE UNUSED.
- ② FOR BEST PERFORMANCE SECONDARY SHOULD BE LOADED WITH HIGH QUALITY 600Ω RESISTOR.
- ③ GREEN/YELLOW WIRE SHOULD BE CONNECTED TO AUDIO CIRCUIT GROUND.
- ④ THESE TRANSFORMERS ARE UN-IMPREGNATED FOR IMPROVED SOUND QUALITY. TAKE GREAT CARE IF CLAMPING BOLTS + END-BELLS ARE REMOVED - ALL LAMINATIONS ARE LOOSE!
- ⑤ IMPEDANCE RATIO - 10KΩ : 600R  
GAIN RATIO = 4.3 : 1
- ⑥ PREFERRED PRIMARY CURRENT 10 - 20 mA.