



Summit series type S - 9

single ended output transformer

3300 Ω to 4 and 8 Ω

optimized for 300B type power triodes in 10 Watt mode
(400V 80mA condition)

- Hi-grade SiFe grain oriented dual C-core
 - virginal PTFE interlayer dielectric
 - vari-lay inter-winding technique
 - 6 – 151,000 Hz bandwidth
 - 0,27 dB insertion loss

The Summit series " type S-9 " is a single ended output transformer designed around the 300B triode in its 400 Volts plate voltage operating conditions offering :

" 10 Watts rms in Class A1 mode "


The 300B is a vacuum triode with a long history of high performance and great sound. This tube is receiving praise from a wide range of listeners and amplifier producers.

This tube features midrange harmonic textures that are lusciously sweet sounding.


E L E C T R I C A L D A T A

Primary impedance	3300 Ω
Secondary load impedance	4 and 8 Ω
Winding ratio (4/8 Ω)	28.67 / 20.34
Bandwidth (-3 dB @ 1W, sec. grounded)	6 – 151,000 Hz
Core saturation	17 Hz @ 10W rms
Primary inductance	33 Hy
Leakage inductance	5.3 mH
Shunt capacitance sec. grounded	461 pF
Shunt capacitance sec. floating	268 pF
Primary DC resistance	106 Ω
Sec. DC resistance 4/8 Ohm	0.130 / 0.254 Ω
Insertion loss 4/8 Ohm	0.27 / 0.27 dB


level (dB) vs. frequency (Hz) 4 ohm - grounded secondary

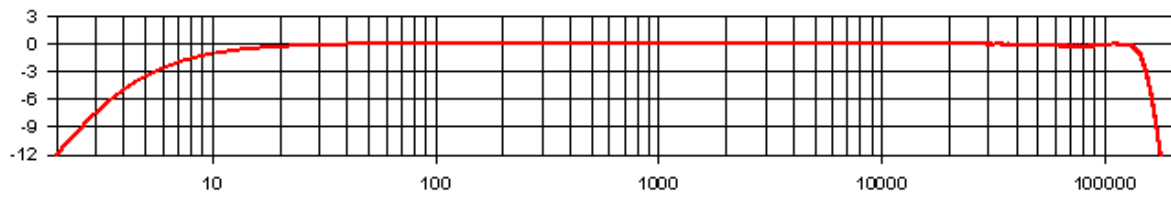

level (dB) vs. frequency (Hz) 8 ohm - grounded secondary

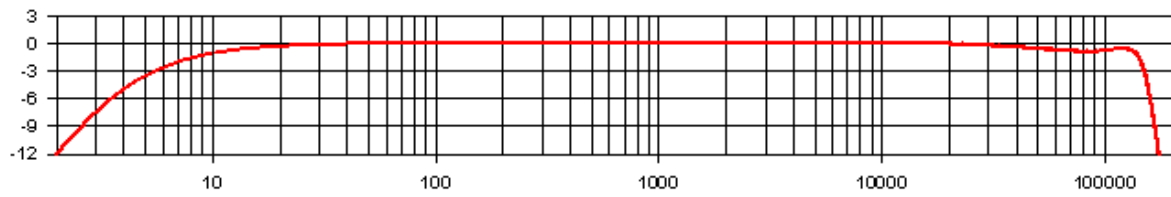

MECHANICAL DATA AND ELECTRICAL CONNECTIONS

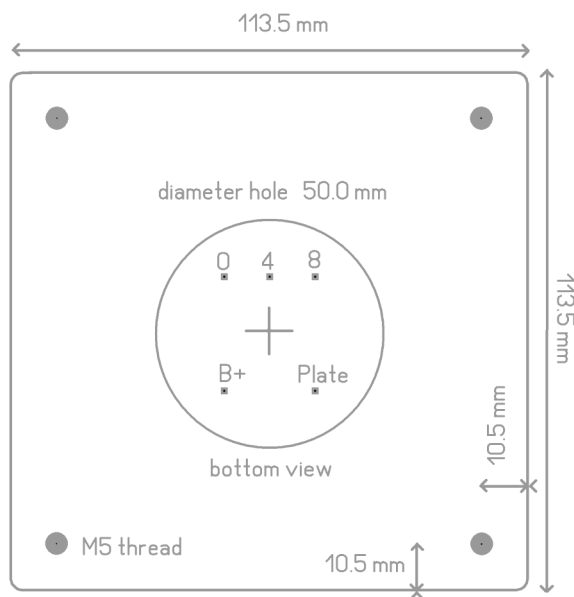

Enclosure style	Case-2
Width-depth-height	113.5x113.5x117.5mm
Mounting holes	92.5 x 92.5 mm Dia 5.5mm thread M5
Terminal board	Centered dia 50.0 mm
weight	... gram