



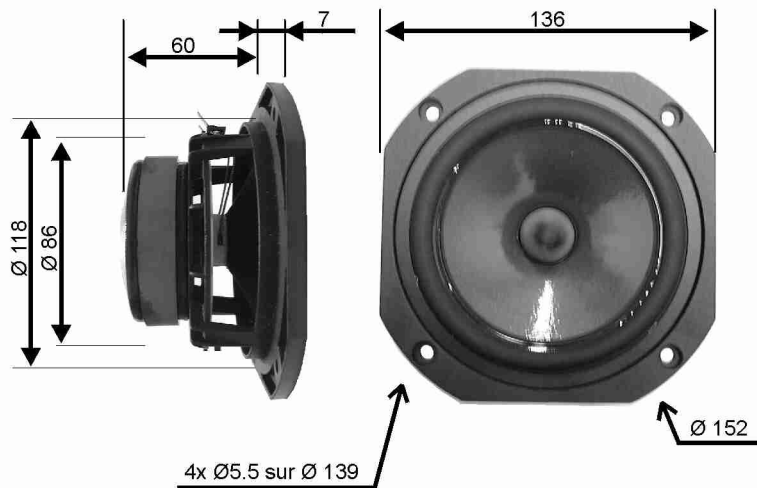

Non resonant die cast chassis
High loss rubber surround
High temperature voice coil

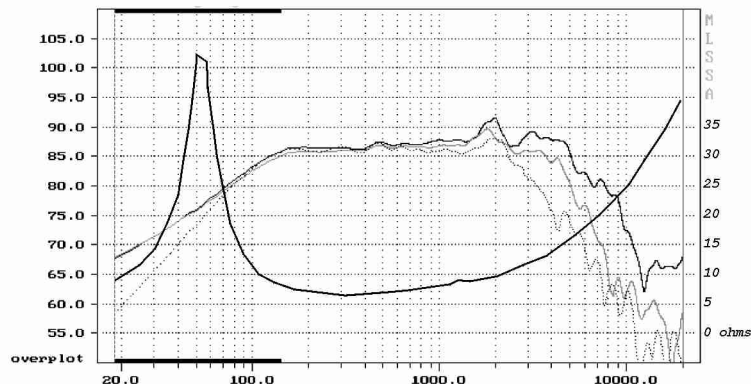

Nominal impedance... 8 ohms
Resonance... 54.94 Hz
Power handling (IEC)... 50 W
Sensitivity (2.83V/1m)... 87.8 dB

Resistance (DC)... 6.28 ohms
Inductance... 0.33 mH
Xmax... ± 3.1 mm
Qms... 4.78
Qes... 0.44
Qts... 0.41
Vas... 10.69 l

Voice coil diam... 25 mm
Voice coil length... 11.2 mm
Former... kapton
Layer(s)... 1
Wire type... flat
Force factor... 6.11 NA
Moving mass... 7.65 gr

Cone material... HDA
Suspension... rubber
Chassis... die cast
Total mass... 1.1 kg

